HYDRAULIC POWER UNITS

L STYLE TANK





LT100 "L" Tank

Features

LT Series

- Lower Profile: Unit can be mounted under work tables, conveyors, etc. Easy access to pump and motor.
- Flooded Suction: Longer pump life; pump always stays primed. No pump rusting during shut-down periods. Air bleed valves are not required.
- Easy Reservoir Draining: Pump not required for draining. Drain ball valve provided.
- 4. **Self Flushing:** System flushes any material in suction line when a pump is replaced.
- Color Code Identification: Allows for easy identification of items.
- 6. **In-Tank Filter System:** Provides easy element replacement without line drainage.
- Convenient Suction Strainer Maintenance: Clean out access cover allows replacement of suction strainer without draining reservoir.
- Removable Top Plate: Removable top allows for easy reservoir cleaning. No leaky end bells that make access for cleaning difficult.
- 9. **Integral Drip Pan:** Pump/ motor mounting area serves as drip pan- drain ball vlave included standard.

ITEM IDENTIFICATION:


- 1. CLEAN-OUT COVER (YELLOW)
- 2. VALVE MOUNTING AREA
- 3. RETURN FILTER (YELLOW)
- 4. TANK LID
- 5. RUBBERIZED GASKET
- 6. TANK BODY
- 7. FILLER/ BREATHER
- 8. SIGHT & TEMPERATURE GAUGE
- 9. SUCTION STRAINER WITH BYPASS VALVE
- 10. 1/2" NPT DRAIN BALL VALVE WITH PLUG
- 11. MAGNETS (1 PER 5 GALLONS)
- 12. (3) RETURN COUPLINGS STANDARD
- 13. 2" NPT HEATER COUPLING (OPTIONAL)
- 14. SUCTION BALL VALVE
- **15.** PUMP
- 16. PUMP MOTOR ADAPTER (ORANGE)
- 17. ELECTRIC MOTOR
- 18. PRESSURE GAUGE WITH SNUBBER
- 19. FILTER INDICATOR GAUGE (OPTIONAL)
- 20. HEATER (OPTIONAL)
- 21. HEAT EXCHANGER (OPTIONAL)
- 22. COOLING FAN (OPTIONAL)
- 23. PAINT (OPTIONAL)


COLOR CODES: BLUE- UNIT COLOR PAINT ORANGE- DANGER YELLOW- MAINTENANCE GRAY- ELECTRICAL



Dimensional Data

(see "LTT" for L style units under 20 gallons)





Model	Reservoir	Dimensions (Inches)								Maximum	
Number	Capacity	Α	В	C	D	Е	F	G	Н	Std. Return Filter (10□)	Horsepower
LT20	20 Gallon	35.0	17.5	15.4	32.0	12.0	12.0	8	30.6	ITF200-8FS-10MNPE	5
LT35	35 Gallon	45.0	22.5	17.5	36.5	13.5	13.5	8	35.3	ITF200-12FS-10MNPE	15
LT70	70 Gallon	51.6	26.3	20.5	46.5	16.5	16.5	8	45.3	ITF250-12FS-10MNPE	50
LT100	100 Gallon	51.6	26.3	26.0	46.5	22.0	22.0	8	45.3	ITF425-24FS-10MNPE	100
LT150	150 Gallon	51.6	26.3	38.0	46.5	33.0	34.0	8	45.3	ITF450-24FS-20-10	100
LT200	200 Gallon	72.0	36.0	38.0	48.5	37.5	34.0			ITF450-24FS-30-10	150
LT500	500 Gallon	92.6	46.3	41.5	71.0	37.5	37.0			ITF450-24FS-30-10	150





HYDRAULIC POWER UNITS

L STYLE TANK



LT & LTT Series

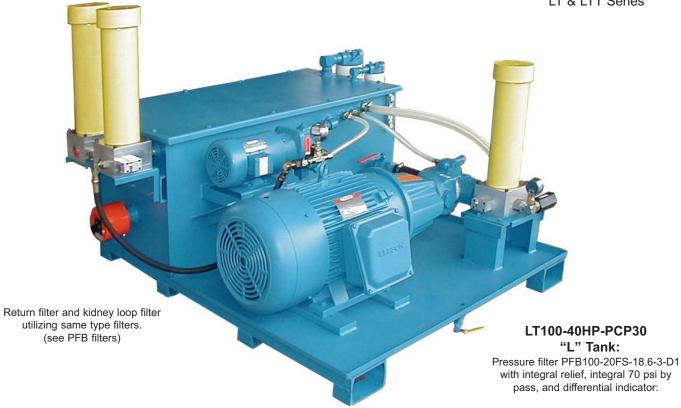

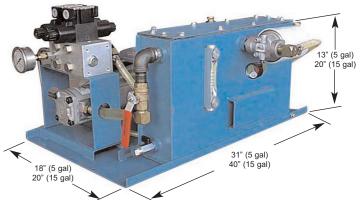



LTT "L" Tank Tall

LTT5, 5 gallon tank dimensions: 5"w x 21"l x 12.8"h

LTT15, 15 gallon tank dimensions: 7"w x 32"l x 17.8"h



LTT "L" Tank Tall- Welded (Completely sealed reservoir versions available)